

NOTE:

GENERAL CONSTRUCTION
TOLERANCE: ± 5 mm [± 0.2"]


INSTALLATION REQUIREMENT

SPACE FOR MAINTENANCE
ABOVE TOP OF THE CABIN ON
THE INTERNAL SIDE:


- *MIN. 300 mm [11.81"]
- *RECOMMENDED 750 mm [29.53"]

*if space does not meet the
required specifications contact
us to discuss alternatives


FRONT VIEW
NON SECURE SIDE

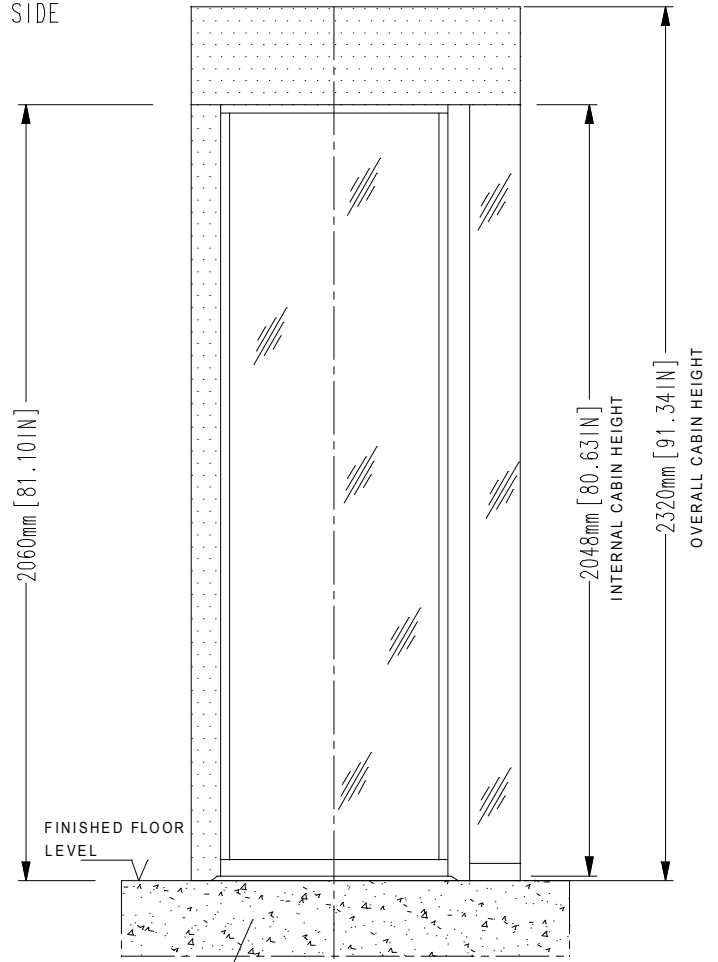

DETAIL 'A'

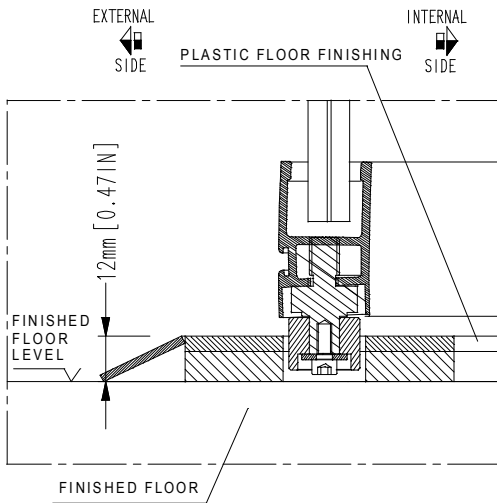

TOP VIEW

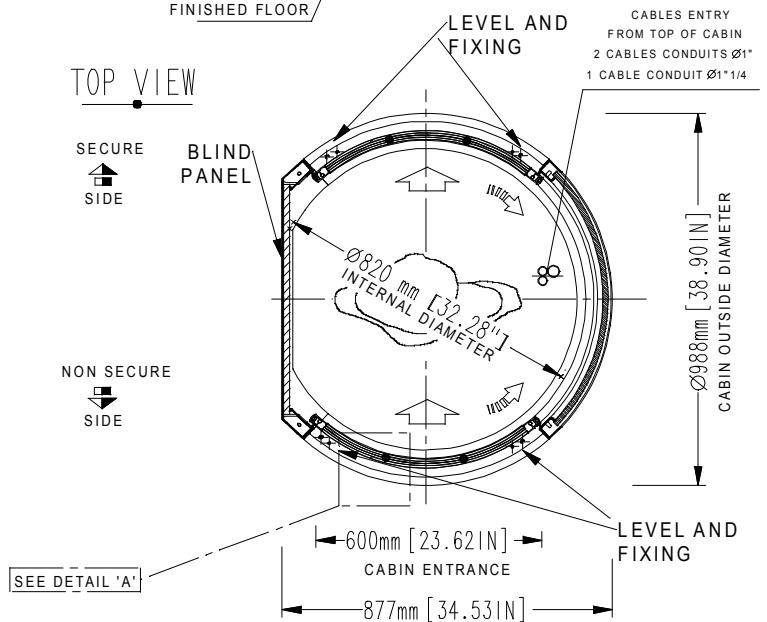

NOTE:

- unit must be installed on to a level floor
(suggested flatness tolerance: ±1 mm)
- coating option: 2 mm thickness in
addition to size

2	11/03/2019	MODIFIED SOME DRAWING DETAILS	L.BERTAZZO
1	18/04/2018	MODIFIED WIDTH	ISABELLA
REV	DATE	REVISION DESCRIPTION	DRAWN BY
DRAWN BY: ISABELLA		DESIGNED AND MANUFACTURED BY: alluser INDUSTRIE designed for your security	DISTRIBUTED BY:
DATE: 23/10/2017			
DRAWING NUMBER: EARC394			
REVISION: 2			
SCALE: 1:20		TITLE/DESCRIPTION	<i>Flush mounted to floor (no recess required)</i> <i>Overall dimensions and mechanical installation requirement</i>
PAGE 1 OF 1		C1DR-C1DKR MY16	

THIS DOCUMENT IS AN ALLUSER INDUSTRIE PROPERTY AND IT CANNOT BE COPIED OR TRANSFERRED TO THIRD PARTIES WITHOUT A PREVIOUS WRITTEN AUTHORIZATION. DUE TO OUR POLICY OF CONTINUOUS PRODUCT DEVELOPMENT, ALL DIMENSIONS AND SPECIFICATIONS DESCRIBED IN THIS DOCUMENT ARE SUBJECT TO CHANGE WITHOUT NOTICE.